

ThermalAir TA-5000B

An Evolution in Localized Temperature Test Systems

More Technology

More Control

More Temperature Capacity

More Energy Saving

Unique architecture of the ThermalAir TA-5000 creates unprecedented performance while saving up to 50% on electricity/ energy/ power!



Performance Plus! - Productivity!

- Continuous Air Flow up to 25 SCFM @-80°C / +225°C
- -55°C to +125°C / +125°C to -55°C less than 10 sec
- Ultra Stable DC Temperature Control
- Frost Free Operation / Built-in Air Dryer
- No LN₂ or CO₂ Required
- CFC Free / CE Mark

Flexibility

- Full Color Touch Screen Display on the Front Panel
 - USB & SSD Thermal File Management & Data Logging
 - Easy Roll Around wheels for portability
 - Plug-in Anywhere 185 to 250 VAC, 50/60Hz
- [No configuration required]



Extremely low audible noise refrigeration built-in DC Chiller for engineering lab environment



Active temperature control and settable ramp rates for Temperature Profiling, Cycling, Thermal Shock and Testing directly at application on the bench top and production floor

Flex Extender Air Transfer Hose available in 2 to 6 ft. lengths provides maximum flexibility and reach, in the lab, on the benchtop, or in the production line. [No hardware or tools required]

ThermalAir TA-5000B Temperature Conditioning System

Specifications

Compact Chamber Clamshell Style

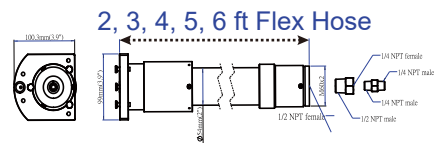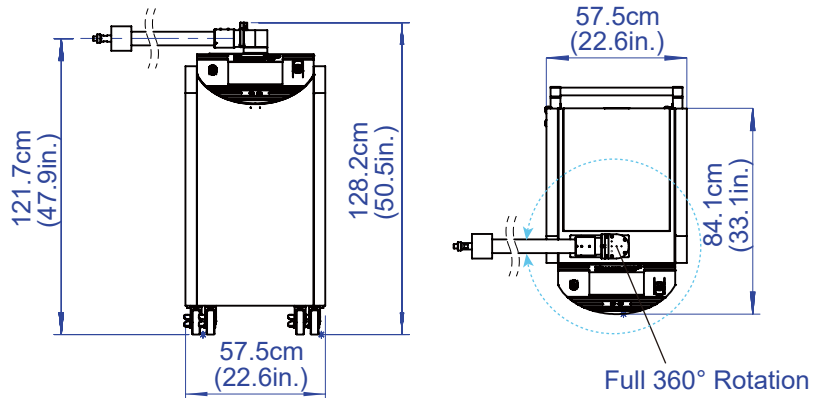

Full Interface For All Communication Control Requirements

4 USB-Type A, 1 USB-Type B, HDMI, IEEE-488, LAN, RS-232, T-Type, K-Type and RTD temperature sensors PLUS Auto Start Test & End of Test for automatic temperature cycling Hot-Cold-Amb.

All these are made for simple control and serviceability.

Specifications

Temperature Performance & Airflow Capacity

Temperature Range	-80°C to +225°C (50/60Hz same system, same temperature performance)
Typical Temperature Transition Rate	-55°C to +125°C / +125°C to -55°C <10 sec
Temperature Accuracy	± 1.0°C (calibrated system)
Temperature Resolution	± 0.1°C
Temperature Air Output System	4 to 25 SCFM (1.9 to 11.8 l/s) Continuous
Temperature Control Methods	Environmental Internal Air TC and Remote External Type T, K, RTD (TC Sensors)

Note: Systems DO NOT degrade @ 50Hz or @ High Air Flow Output Rates

Dimensions & Weights

Base Unit & System Weight	W=57.5cm(22.6in.), D=92.8cm(36.5in.), H=136.3cm(55.7in.) Un-packed : 265kg (584 lbs) / Packed : 395kg (870 lbs)
Portability	Static dissipative, four easy roll swivel caster wheels
Noise Level	<49 dBA average

Facility Requirements / Compressed Air

Power	185 - 250VAC (220 Nominal), 60 / 50Hz, 30amp, 1 phase
Clean, Dry Air (CDA)	Filtered to 5µ particulate contamination Oil Content: < 0.10 ppm by weight and filtered to 0.01µ oil contaminants
Input Air Dewpoint	<10°C @6.2BAR (90PSI)
Input Air Pressure	90 to 120 PSIG (6.2 to 8.3 BAR)
Input Air Flow	15 to 30 SCFM (7.2 to 14.3 l/s) 25 SCFM nominal
Input Air Temperature	+15° to +25°C, +22°C nominal
Operating Temperature Environment	+15° to +28°C, +23°C nominal
Operating Humidity	0 to 60% RH, 45% nominal

MPI Thermal TA-5000B
A Division of MPI Corporation

Temperature Solutions **MPI Thermal** For The Future
A Division of MPI Corporation